


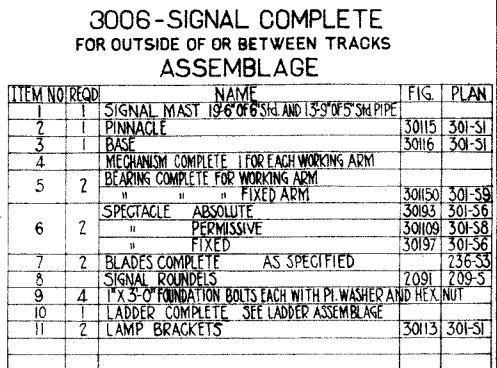

When ordering Electric Motor Signals specify the voltage and whether alternating or direct current is to be used, if alternating specify the frequency.

When ordering signal complete, give plan, assemblage and operation numbers.

Two (2) inches maximum variation allowed either way on total height of mast.

When no detail reference is shown, the Manufacturer's standard apparatus, if approved by the Purchaser, shall be furnished.

LADDER ASSEMBLAGE			
QUANTITY	FIGURE NO.	PLAN NO.	
1	30121	301-52	
1	30122	301-52	
1	30123	301-53	
1	30126	301-53	
2	30128	301-53	
1	30131	301-53	
1	30133	301-53	
6	30141	301-54	
8	30142	301-54	
2	30158	301-54	
2	30160	301-54	
2	30162	301-54	
16	4 x 1/2" 34 Hd bolts and nuts		
18	2 x 1" 3/4" 34 Hd bolts and nuts		

R-RED Y-YELLOW G-GREEN

Redrawn and Revised-6-28-18:



300-S4

STANDARD
POWER OPERATED INTERLOCKED SIGNAL

Conclusions

Signal Engineer

Approved _____

Engineer M. V.