




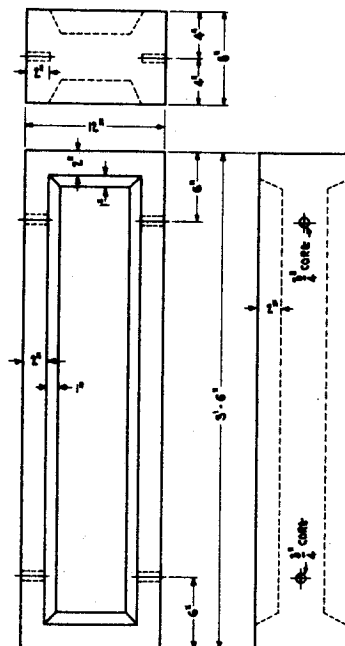


1151 - FOUNDATION
CONCRETE

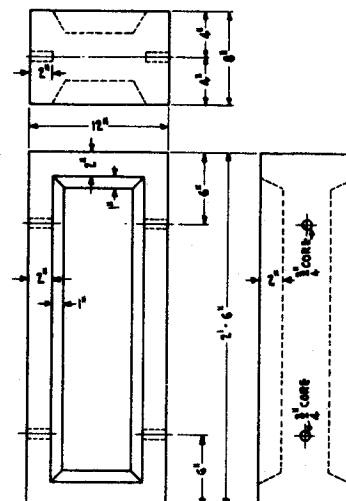


1152 - FOUNDATION
CONCRETE

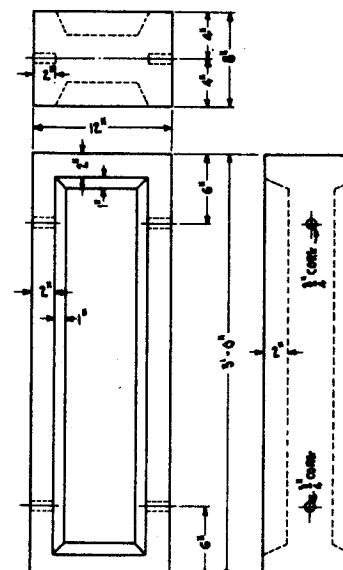


1153 - FOUNDATION
CONCRETE

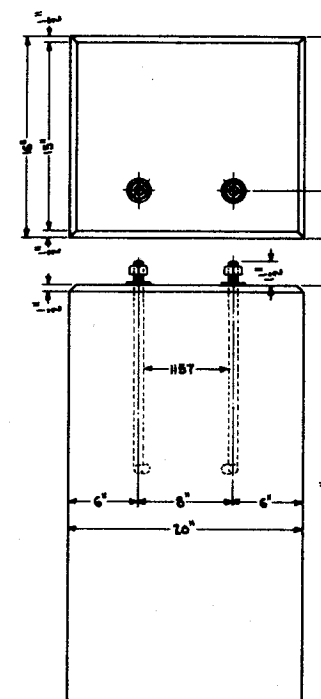


1155 - FOUNDATION
CONCRETE

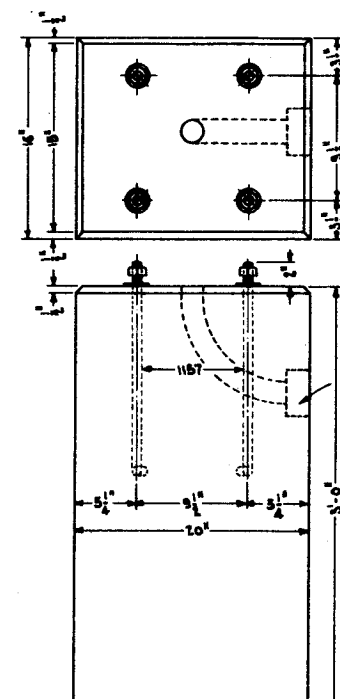

1156 - FOUNDATION
CONCRETE

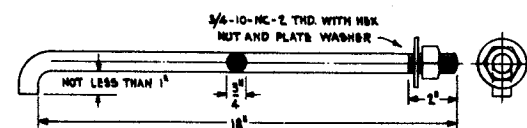

1157 - HOOK BOLT A.H.S.



1158 - HOOK BOLT L = 7 1/2" (FOR USE WITH 1157)
1159 - " " L = 9"
11510 - " " SPECIFY LENGTH WHEN ORDERING.
O.H.S.

NOTE:
1. FOUNDATIONS SHALL BE NOT LESS THAN TWO (2) FEET UNDERGROUND.
2. CONCRETE SHALL BE IN ACCORDANCE WITH A.R.A. SIGNAL SECTION SPEC. 1111.

REVISIONS
REBORN FROM APPROVED PLAN S-115-B,
DATED JULY 17, 1917, AND REVISED.

1 SHEET

S-115-C

THE PENNSYLVANIA RAILROAD
STANDARD

FOUNDATIONS
PIPE CARRIERS AND INSTRUMENT CASES

APPROVED BY: *[Signature]* CHIEF SIGNAL ENGINEER, PHILA., PA., JULY 11, 1917.
APPROVED BY: *[Signature]* CHIEF ENGINEER