
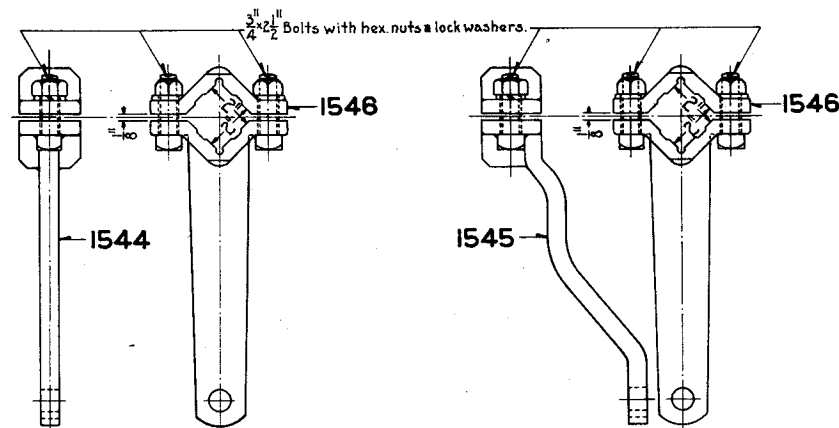


1543-SHAFT.

C.R.S.
R.S.A. Dec. 1912.

Note:-
Hot rolled steel may be used if of exact dimensions.
Maximum distance between arms on Rocker Shaft
not to exceed 12".


1541-STRAIGHT ARM COMPLETE. 1542-BENT ARM COMPLETE.

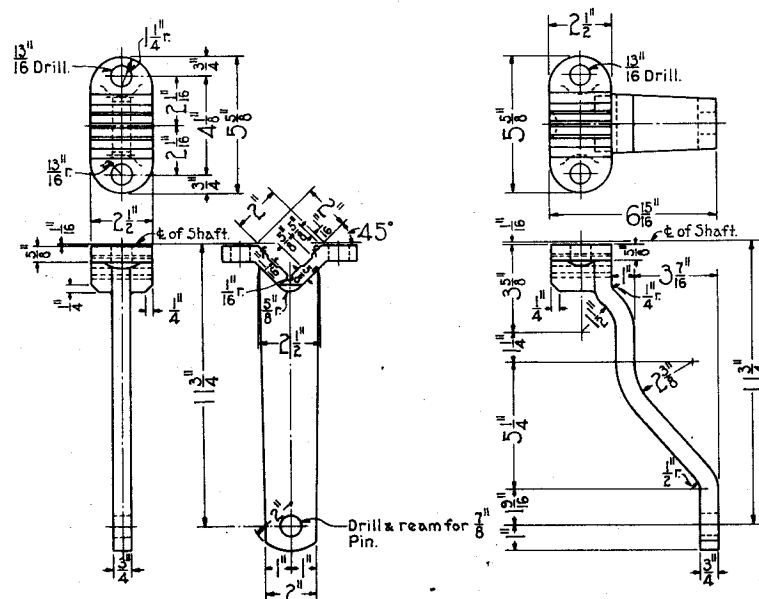

1544-STRAIGHT ARM.

1545-BENT ARM.

1544-1545-1546 to be Mild Steel Forgings

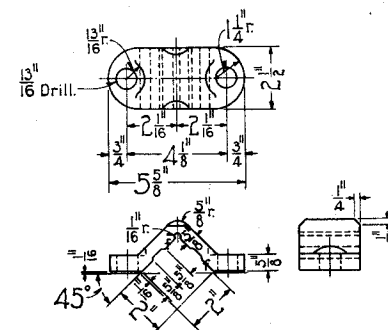

1546-CAP.

R.S.A. Oct. 1912.

REVISIONS.

1 SHEET

S-154-A

PENNSYLVANIA SYSTEM

STANDARD

ROCKER SHAFT AND ARMS

OFFICE OF CHIEF SIGNAL ENGINEER, PHILA., PA., SEPT. 2, 1921.

Correct

Chief Signal Engineer.

Approved

Chief Engineer.

