



5282-EYELET

*25(.0179") B. & S. G. COPPER.




5283-EYELET.


*29(.0113") B. & S. G. COPPER.




5284-TAG.




5285-TAG.



5286-TAG.



5287-TAG.

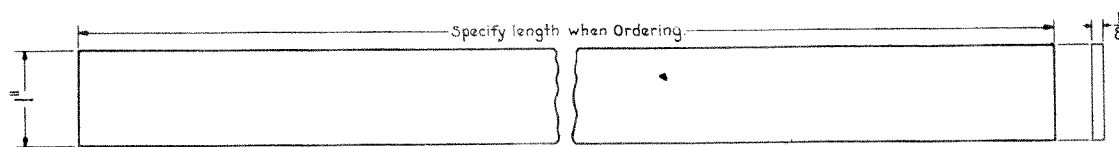


5288-STRIP

Note:-

All tags and strips must be made of a good grade of Red or Black vulcanized sheet fibre $\frac{1}{8}$ thick.

Use Eyelet 5282 for #16 Flexible Wire.

- 5283 " machine combination wire
- flat nose Pliers with parallel jaws for setting eyelets



Application of Eyelets to flexible wire

REVISIONS.

B - OCTOBER 31, 1923
APPROVED: *Art. P.*
C - MARCH 14, 1927
APPROVED: *Art. P.*

1 SHEET

S-528-C



THE PENNSYLVANIA RAILROAD
STANDARD

EYELETS AND TAGS

OFFICE OF CHIEF SIGNAL ENGINEER, PHILA., PA., JUNE 10, 1921

Correct

Art. P.

Chief Signal Engineer.

Approved

Art. P.

Chief Engineer.