




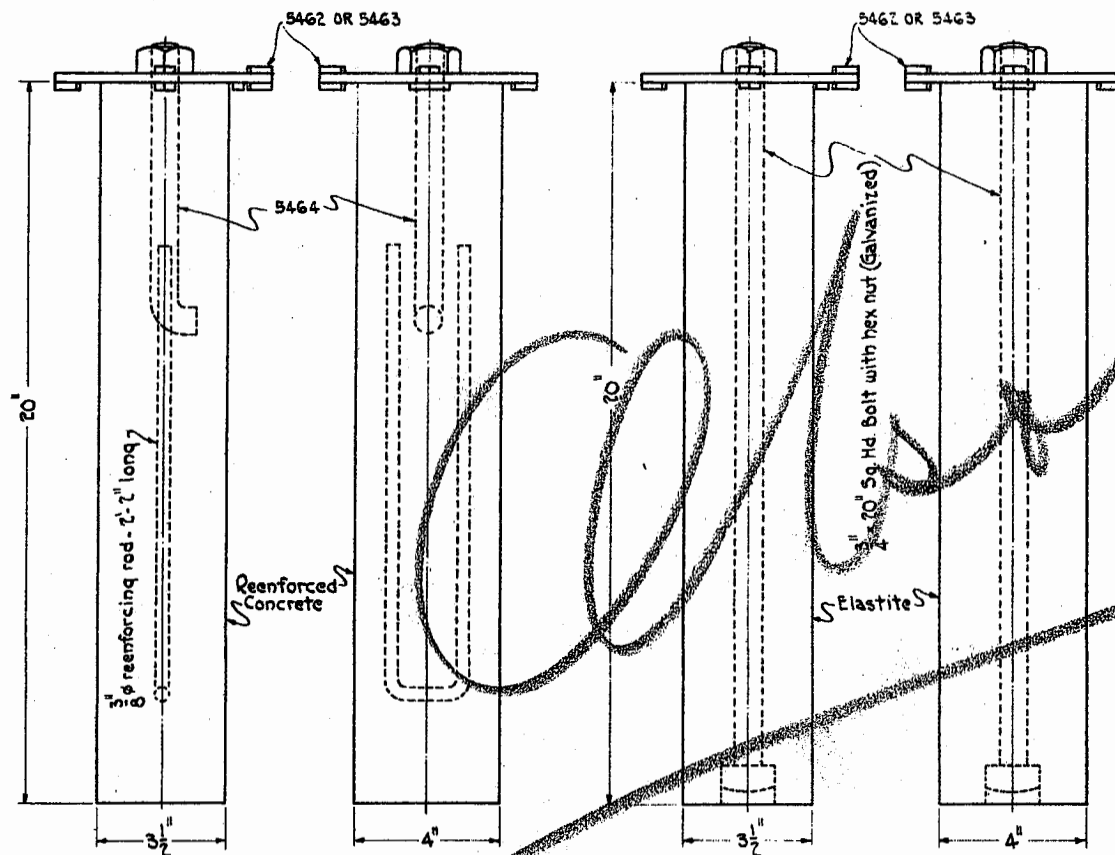


5461-MARKER COMPLETE
Elastite or reinforced concrete.

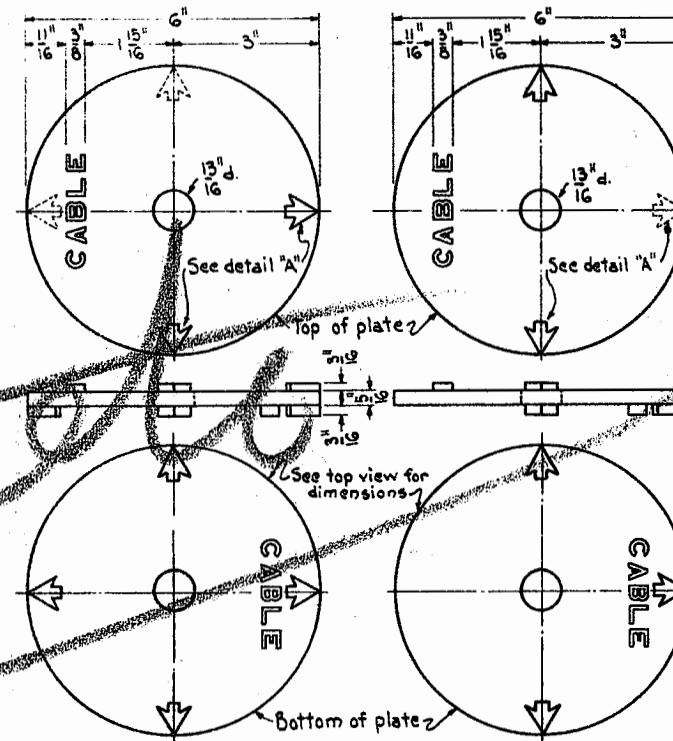


5462-PLATE M.I.


5463-PLATE M.I.

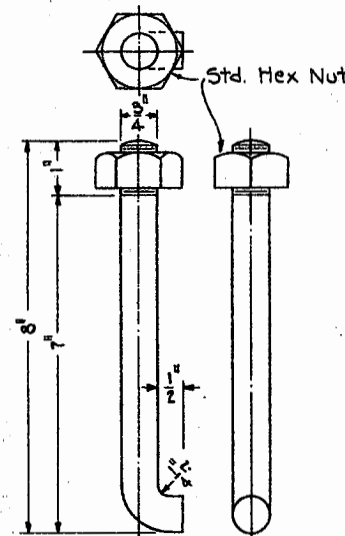

5464-HOOK BOLT
G.I.



-METHOD OF INSTALLATION
Markers to be arranged to show direction of cable runs as indicated in sketch above.
Maximum distance between markers shall not exceed two hundred feet.



Revisions

1 Sheet S-546-A

THE PENNSYLVANIA RAILROAD
STANDARD
CABLE MARKER
FOR UNDERGROUND CABLES

Office of Chief Signal Engineer, Phila., Pa., Nov. 11, 1933.

Approved: *A. H. Ried* Chief Signal Engineer Approved: *W. H. Higgins* Actg. Chief Engineer