

NOTE:-

Concrete or stone foundations to be used only in made or soft ground.


When concrete or stone foundations are not used the post is to be planted 2'-6" deep in the ground.

Face of letters and border to be painted black on white ground.

Back of sign and post to be painted black.

Letters raised $\frac{1}{8}$ inch with slight draught.


For proportions of letters see Standard Plan 60146.

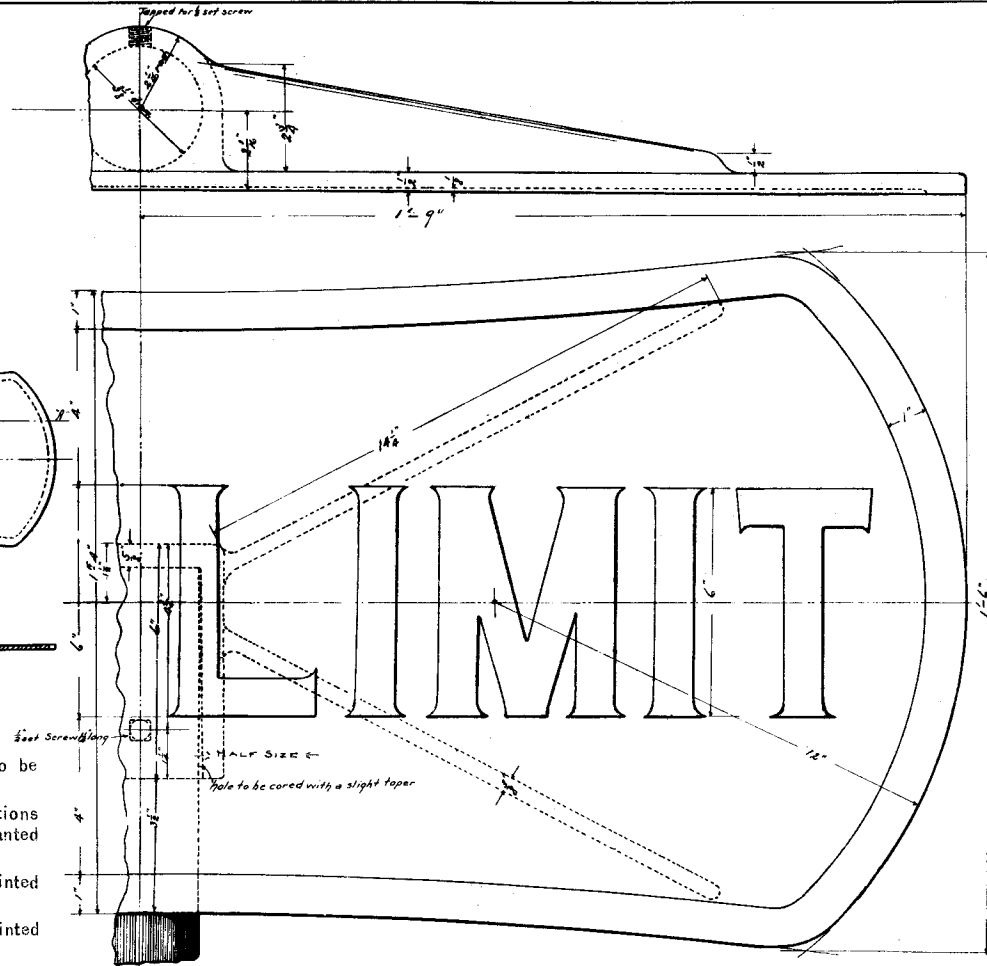

56770

= P.R.R. STANDARD =

= IRON YARD LIMIT SIGN =



CORRECT

Joseph J. Richards
ENGR. M.W.

APPROVED

DEC. 1ST 1900

REVISED SEPT., 1908.
" JUNE 1911.

J. B. Smith
GEN'L MANAGER