

SECTION A-A

SECTION B-B

WROUGHT IRON STEP LAMP BRACKET

NOTE:

Concrete or stone foundations to be used only in
made or soft ground.

When concrete or stone foundations are not used
the post is to be planted 2' 6" deep in the ground.


Face of letters and border of Slow sign to be painted
white with green ground.

Face of letters and border of Yard Limit sign to be
painted black with white ground.

Back of sign and post to be painted black.

Letters raised $\frac{1}{8}$ inch with slight draught.

For proportions of letters see Standard Plan 6046.

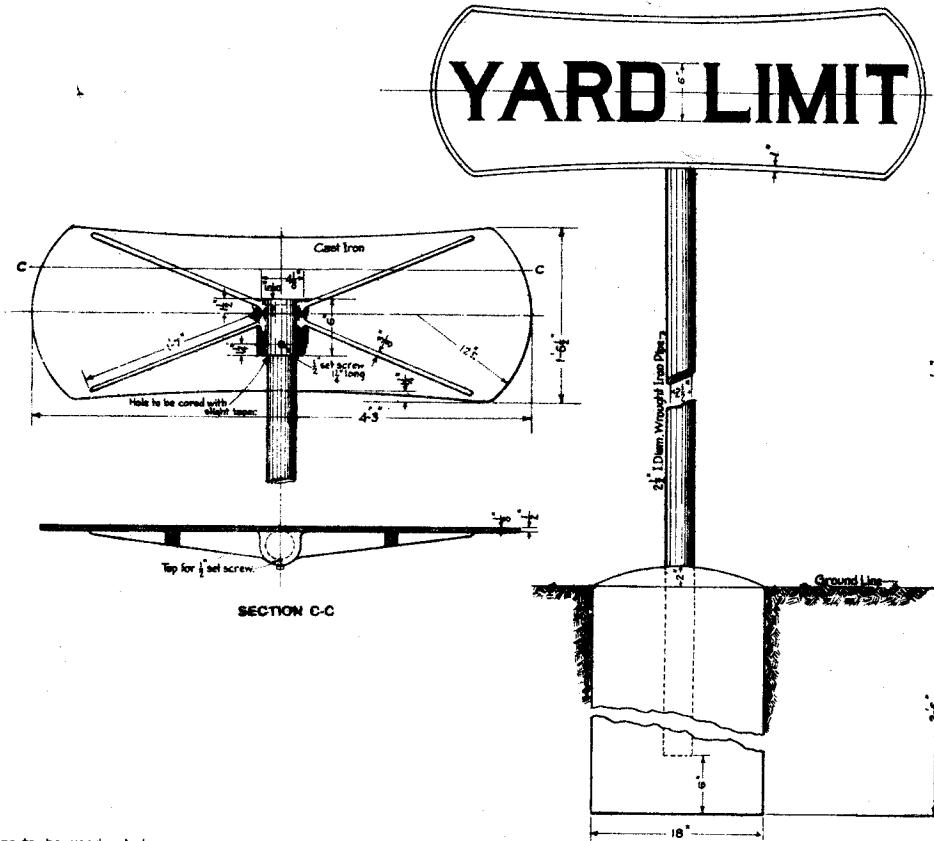


SECTION C-C



59390
P. R. R. STANDARD
SLOW & YARD LIMIT SIGNS

OCTOBER 1912



DRAWN BY *C. W.*
ENCHED BY *E. W.*

Correct

H. J. Richards
ENGINEER M. W.

Approved

H. J. Richards
CHIEF ENGINEER M. W.

Approved

H. J. Richards
GENERAL MANAGER