

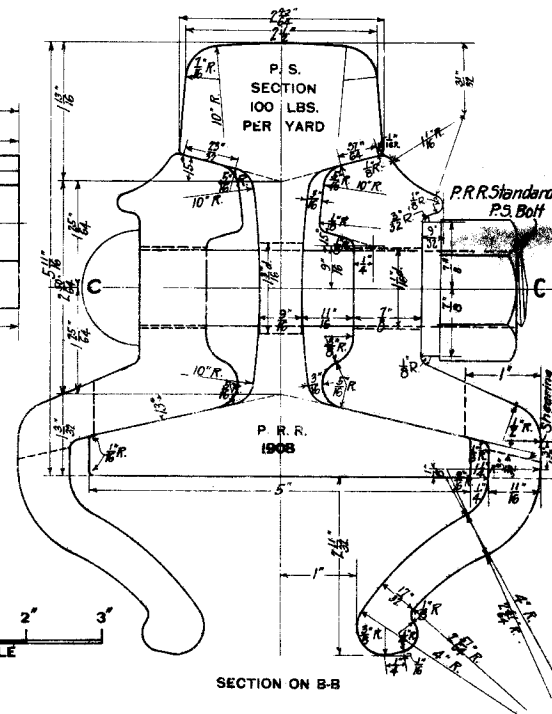


DRILLING FOR 100 LBS. RAIL

Note:- Bolt holes in 100 lbs. rails are to be drilled $1\frac{3}{16}$ in. in diameter.

Splices to be marked with manufacturer's name, number of splice and year of manufacture.

Letters and figures to be raised $\frac{1}{16}$ inch.

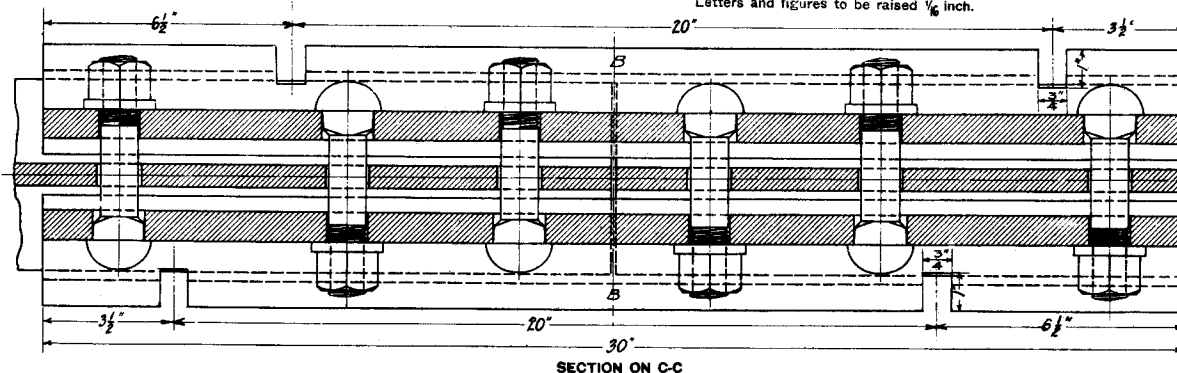

59475
P. R. R. STANDARD
P. S. N° 8 C SIX HOLE SPLICE
FOR
100 LBS. RAIL
MARCH, 1908

REVISED JUNE 1908
" DEC 1908
" JAN. 1913

REVISED JUNE 1908
" DEC 1908
" JAN. 1913

DRAWN BY H.W.
CHECKED BY R.T.

Correct *H. J. Young*
ENGINEER M. W.

Approved J. J. Richards
CHIEF ENGINEER M. W.

Approved W. W. G. G.
GENERAL MANAGER