
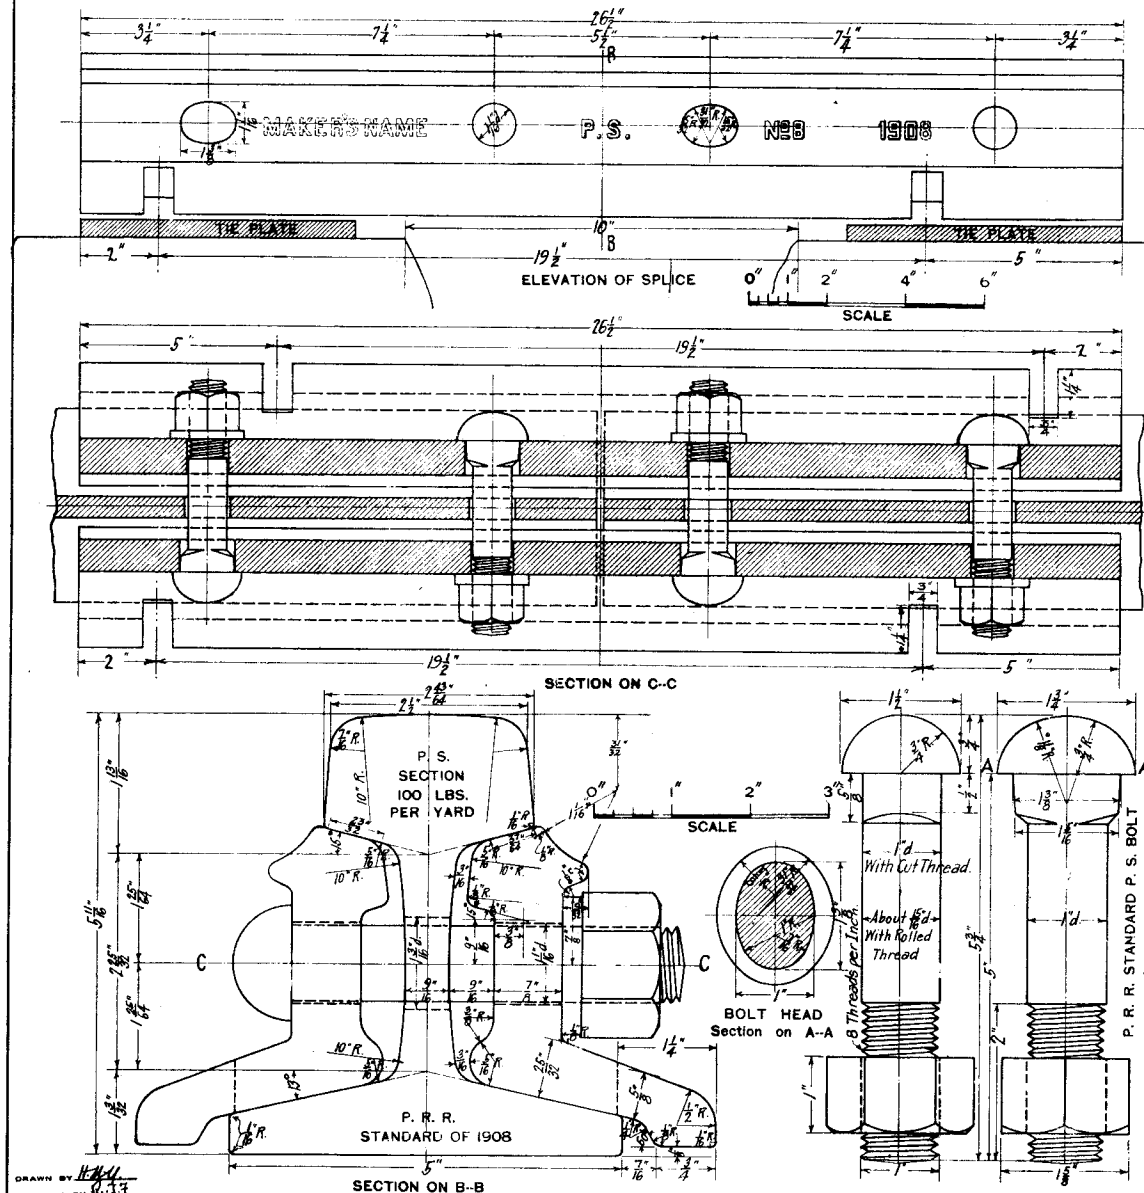
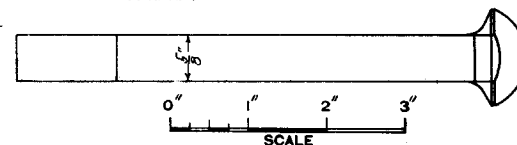


NOTE:- Mark all 6½in. Spikes by heavy centre punch, in heading die, not less than ½in. deep.

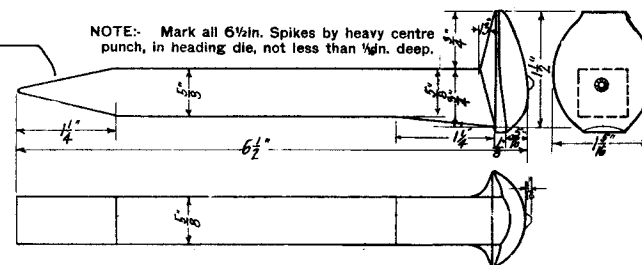

Note:- Bolt holes in 100 lbs. rails are to be drilled $1\frac{3}{8}$ in. in diameter.

Splices to be marked with manufacturer's name, number of splice and year of manufacture.

Letters and figures to be raised $\frac{1}{16}$ inch.

All rails to conform to Pennsylvania Railroad Specifications for Steel Rails.



59480
P. R. R. STANDARD
P.S. N°8 FOUR HOLE SPLICE
FOR
100 LBS. RAIL

With Joint Material
JUNE, 1911.

Correct

ENGINEER M. W.

Approved

Joe J. Richards
CHIEF ENGINEER M. W.

Approved

GENERAL MANAGE