



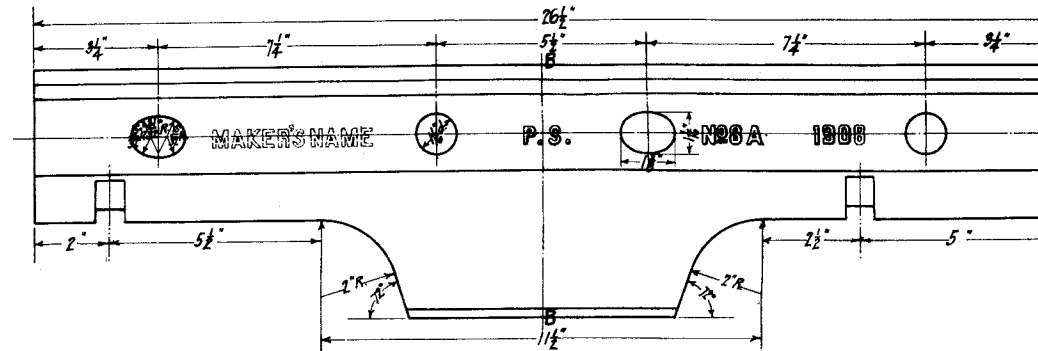


ELEVATION OF SPLICE

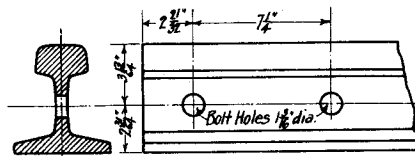


DRILLING FOR 100 LBS. RAIL

Note: Bolt holes in 100 lbs. rails are to be drilled 1 1/2 in. in diameter.
Splices to be marked with manufacturer's name, number of splice and year of manufacture.
Letters and figures to be raised 1/8 inch.


All rails to conform to Pennsylvania Railroad Specifications for Steel Rails.
1 1/2"

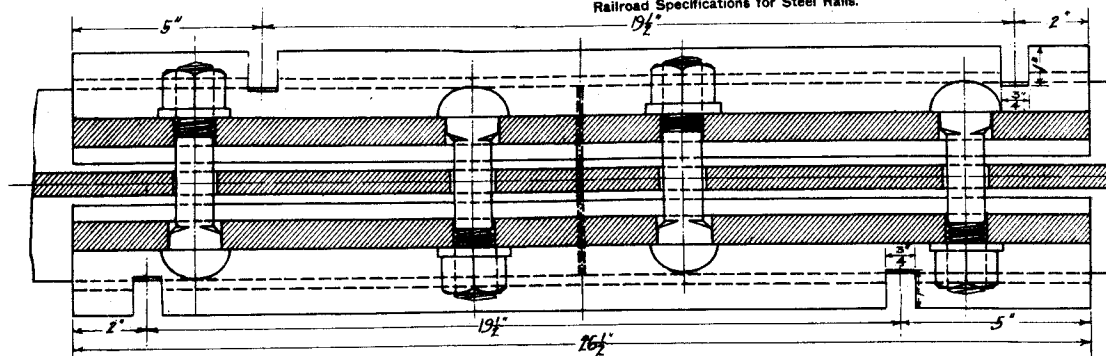

SECTION ON C-C

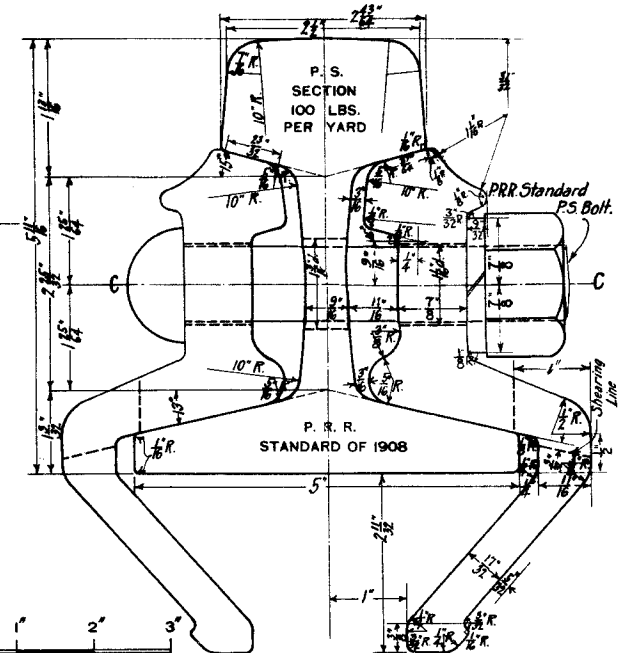

SECTION ON B-B



59481
P. R. R. STANDARD
P.S. N°8A FOUR HOLE SPLICE

FOR
100 LBS. RAIL

REVISED JANUARY 1913

JUNE, 1911.

DRAWN BY *H.M.H.*
CHECKED BY *R.T.H.*

Correct *H.M.H.*
ENGINEER M. W.

Approved *J. J. Richards*
CHIEF ENGINEER M. W.

Approved *J. C. Long*
GENERAL MANAGER