





SECTION A-A

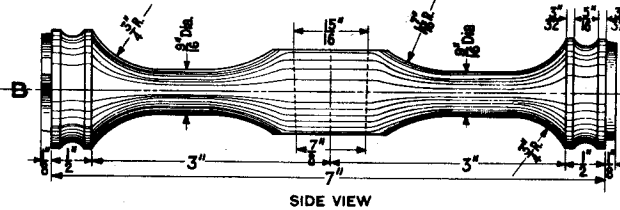





SECTION E-E

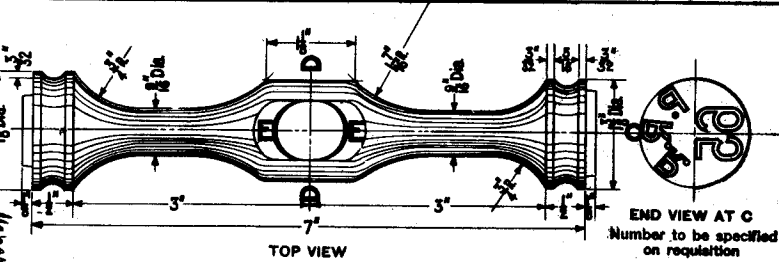

END VIEW AT C
Number to be specified
on requisition

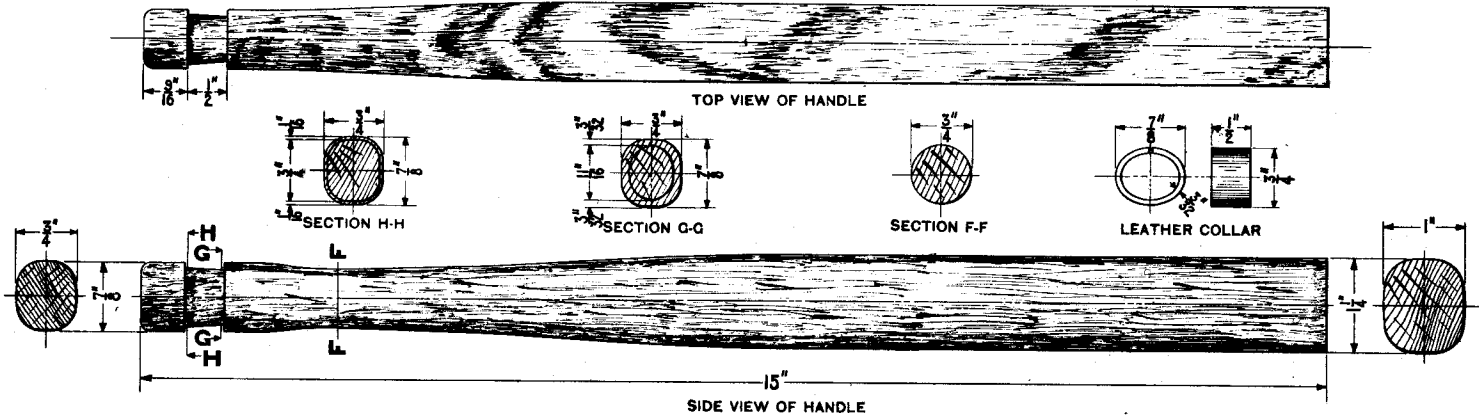


TOP VIEW OF HANDLE



NOTES:-


- Head to be of highest-grade cast steel.
- Handle to be of sound pignut, with a specific gravity (dry) of at least 0.65; to be composed of not more than 20 rings of annual growth; and to be free from cross, spiral, or dip grain.
- Collar to be of thoroughly-tanned leather.



59489

P. R. R. STANDARD
LUMBER INSPECTOR'S HAMMER

MARCH, 1908.



REVIS^{ED}
JULY 1908
FEB. 1911

DRAWN BY F.A.
CHECKED BY J.B.H.

Correct

L. J. Richards
ENGINEER M. W.

Approved

J. J. Richards
CHIEF ENGINEER M. W.

Approved

W. W. Atterbury
GENERAL MANAGER