
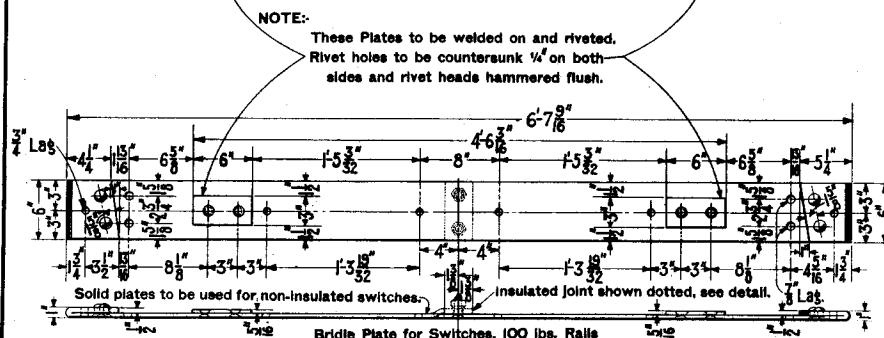





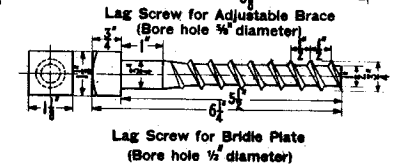


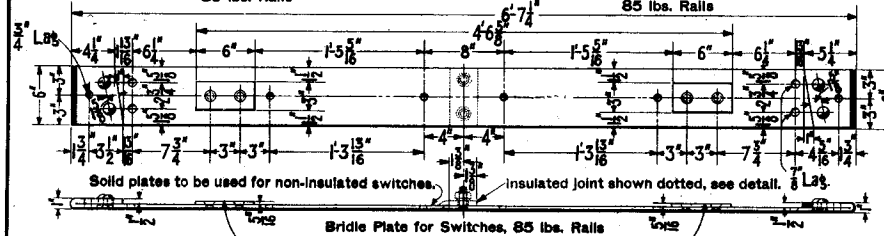
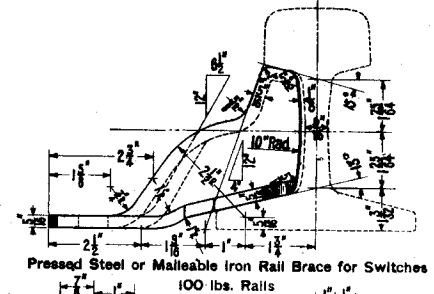
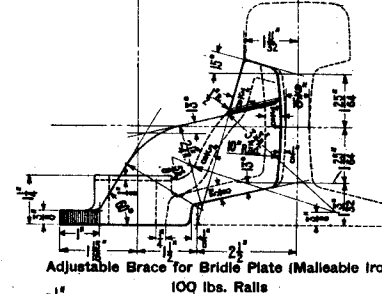
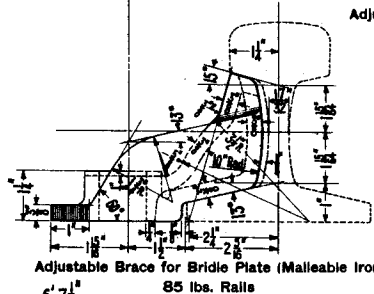
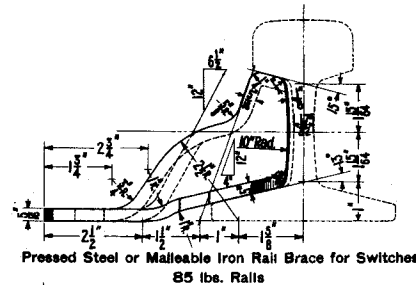
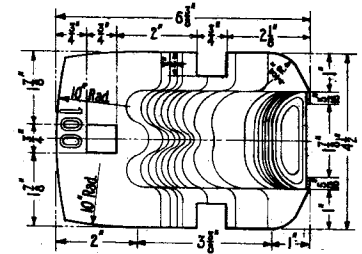







DRAWN BY: F.A.
CHECKED BY: J.B.C.

Correct

John J. Richards
ENGINEER M. W.

Approved

John J. Richards
CHIEF ENGINEER M. W.

Approved

W. H. Myers
GENERAL MANAGER

59699 P. R. R. STANDARD Details for 10', 18' & 30 POINT SWITCHES

Points of Equal Length
FOR 85 LBS. & 100 LBS. P. S. RAIL

REVISED
JAN. 1911.

JUNE, 1909.

