




Note:- The wires and cables to be laid in any approved conduit, to be laid across the railroad company's property with a continuous slope of not less than 1 in. in 10 ft. and to be placed at such depth as may be required by local conditions.

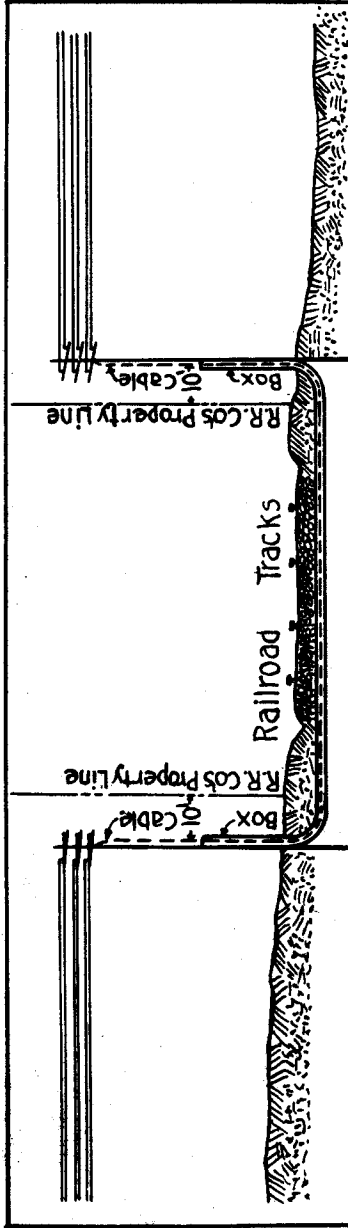

STANDARD

METHOD OF CROSSING A RAILROAD BY TELEGRAPH, TELEPHONE AND ELECTRIC LIGHT CABLES OR WIRES

PHILA., MAY, 1904.

Correct

Approved

Approved

W. W. Richards
Engineer M. W.

W. W. Richards
Chief Engineer M. W.

W. W. Richards
General Manager

PLAN OF LOCATION

61671-A

REVISED:-

JAN., 1917.