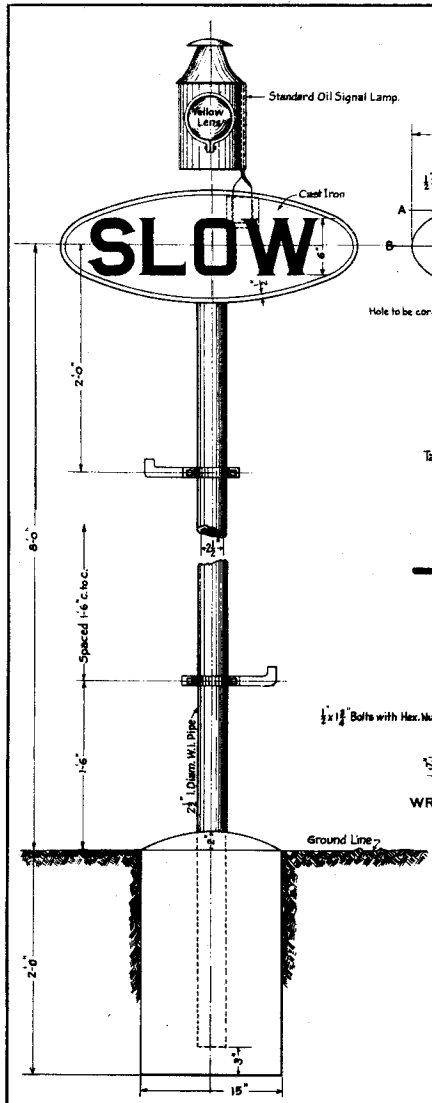

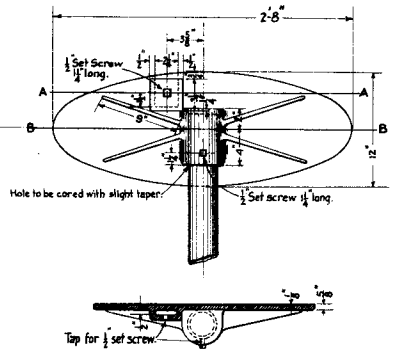

SECTION A-A

SECTION B-B

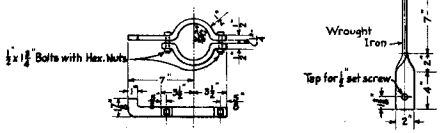

WROUGHT IRON STEP

LAMP BRACKET

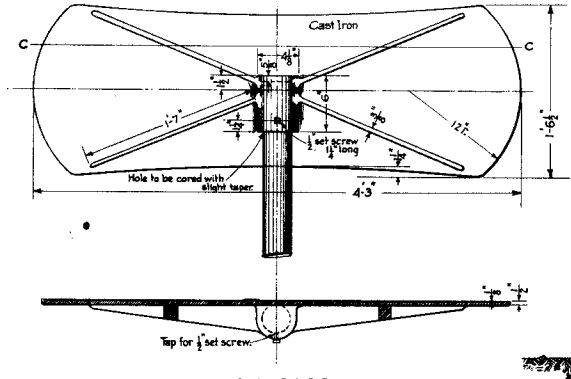

SECTION C-C

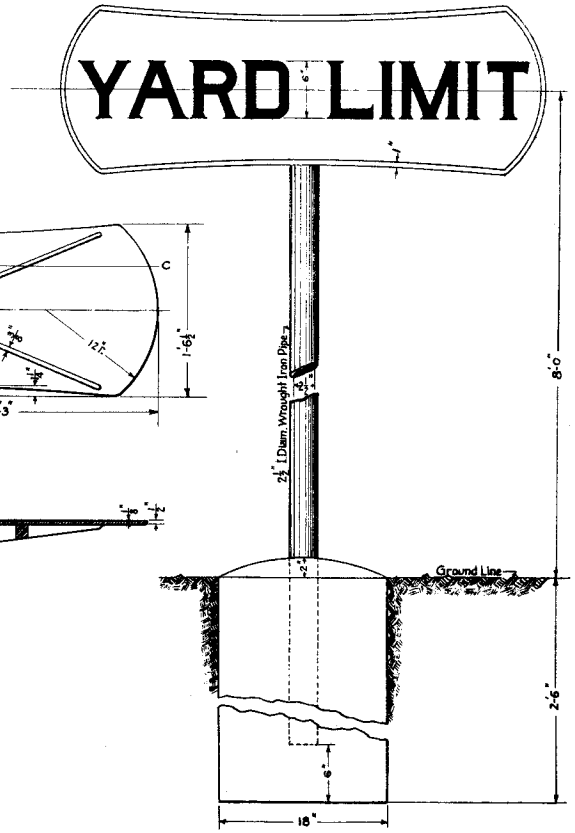

NOTE:-

Concrete or stone foundations to be used only in made or soft ground.

When concrete or stone foundations are not used the post is to be planted 2'-6" deep in the ground.

Face of letters and border of Slow board to be painted black with yellow ground.

Face of letters and border of Yard Limit sign to be painted black with white ground.

Back of sign and post to be painted black.

Letters raised ⅛ inch with slight draught.

For proportions of letters see Standard Plan showing Letters and Figures for Signs and Notices.

ORIGINAL ON FILE OFFICE OF ENGINEER M.W.

61870-A

P. R. R. STANDARD

YARD LIMIT SIGN & SLOW BOARD

OCTOBER 1912

REVISED:- JULY 1916

0' 1' 2'
SCALE

DRAWN BY L.H.
CHECKED BY P.V.A.

Correct _____ ENGINEER M. W.

Approved _____ CHIEF ENGINEER M. W.

Approved _____ GENERAL MANAGER

http://PRR.Railfan.net

Collection of Pat McKinney