

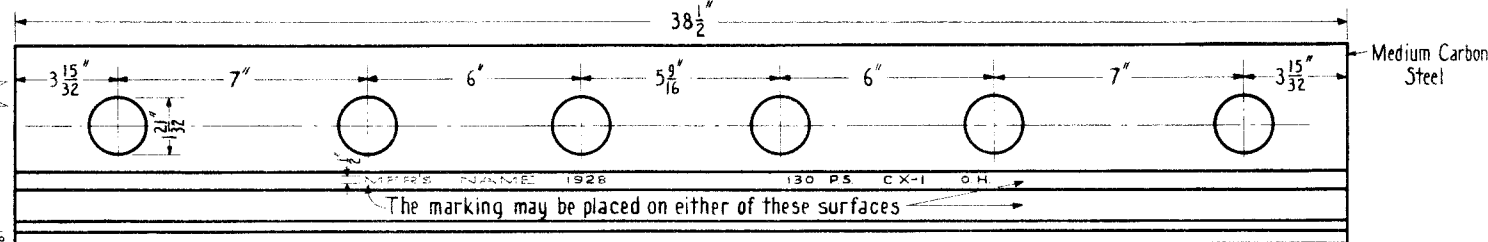



SIDE ELEVATION OF JOINT




JOINT BAR

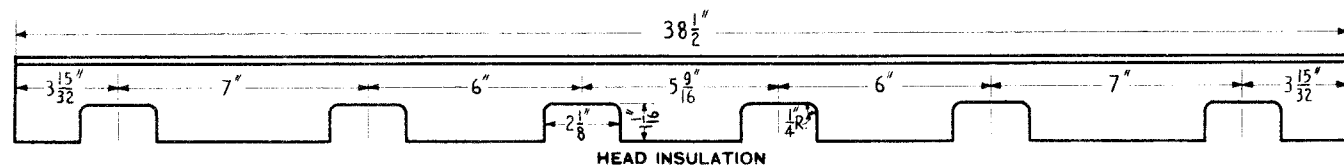


HEAD INSULATION

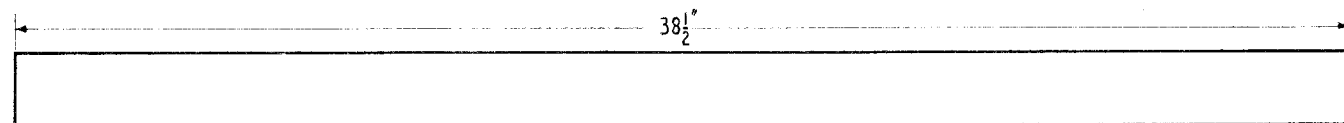

BASE INSULATION

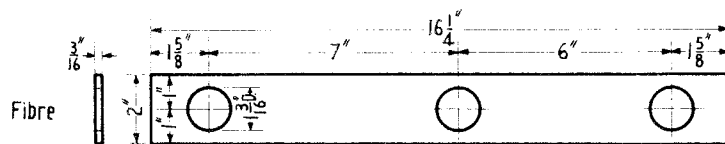

WASHER PLATE INSULATION

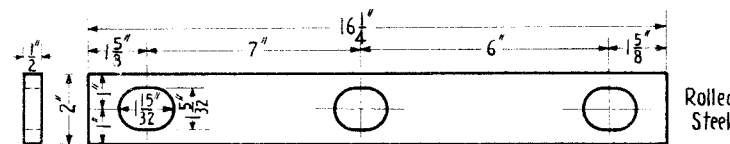

WASHER PLATE

NOTE:
All material shall be furnished in accordance with The Pennsylvania Railroad Company's current Specifications covering the respective parts. Requisitions for repair parts must specify the name (as designated on this plan) of the part required, and the plan number.

NUMBER OF PIECES	DESCRIPTION
2	JOINT BARS
1	END POST INSULATION
2	HEAD INSULATIONS
2	BASE
4	WASHER PLATE
12	BUSHING
4	WASHER PLATES
6	BOLTS AND NUTS
6	HELICAL SPRING WASHERS FOR 1 1/4" BOLTS

as shown in detail on this plan.
as shown in detail of corresponding part on plan of Continuous Insulating Joint for 130 lbs. P. S. Rails Drilled 2 5/32" - 7/8".

71302-B



THE PENNSYLVANIA RAILROAD
STANDARD
CONTINUOUS INSULATING JOINT
FOR 130 LBS. P. S. RAILS
DRILLED 2 5/32" - 6 - 7

Corrected
Engineer of Standards

OFFICE OF CHIEF ENGINEER, PHILA., PA., DECEMBER, 1928

Approved

Chief Engineer