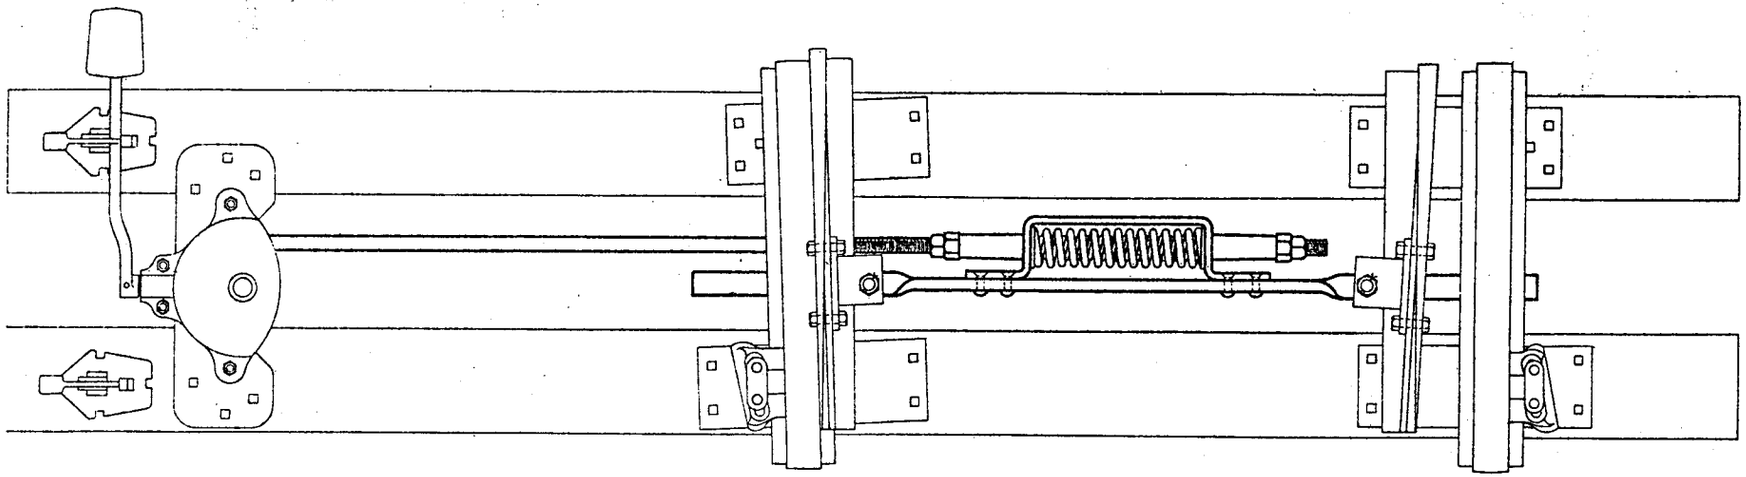

PLAN

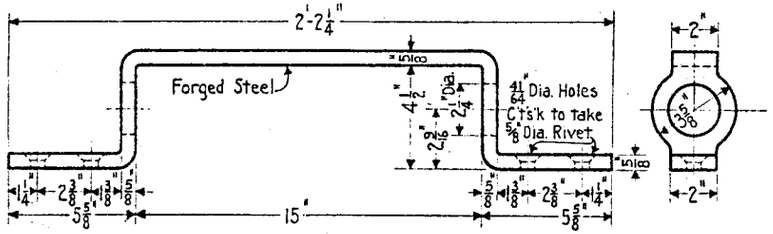

YOKE

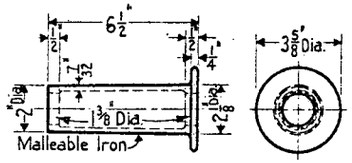

FERRULE

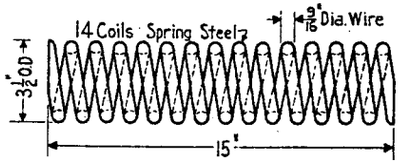

OUTER SPRING

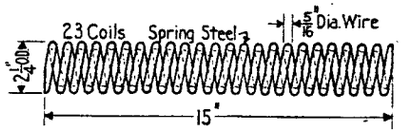

INNER SPRING

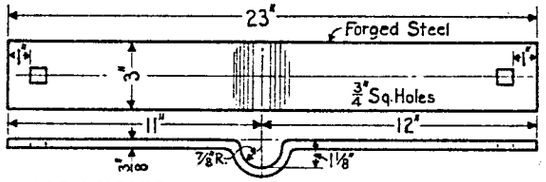

ROD SUPPORT - TO BE FURNISHED WITH 11 FOOT ROD ONLY

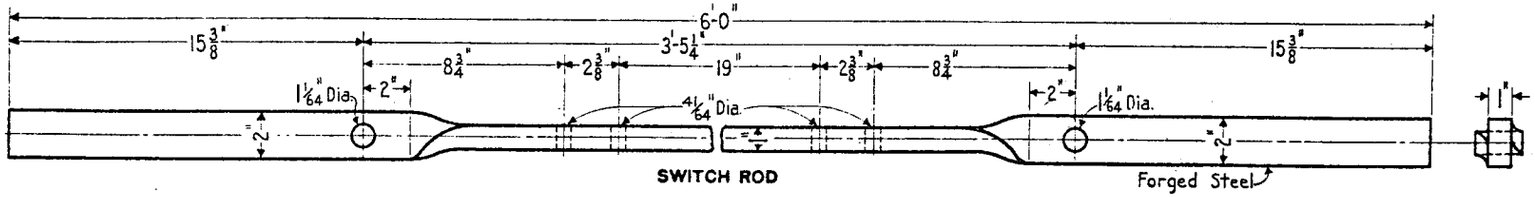

SWITCH ROD

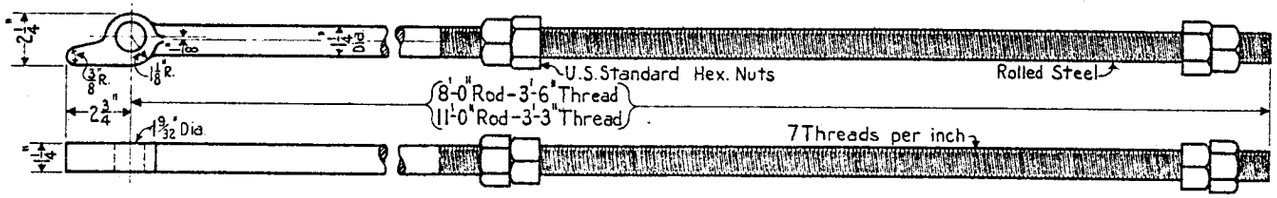

OPERATING ROD

NOTE:- Spring Rods may be used only when authorized by the Division Superintendent and then only in engine house territory where engine movements are made with one hostler in charge.

Requisition must specify length of Operating Rod desired.

The 8 foot Operating Rod shall be used where track centers are 12 feet 2 inches or more, but less than 18 feet 9 inches.

The 11 foot Operating Rod shall be used where track centers are 18 feet 9 inches or more.

For details of Clips see Standard Plan showing Details for Switches and Slip Crossings, Adjustable Brace, Clip, Stop etc.

73605-A

THE PENNSYLVANIA RAILROAD
STANDARD

SPRING ROD FOR SWITCHES

OFFICE OF CHIEF ENGINEER, PHILA., PA., JUNE, 1926

Correct: Engineer of Standards

Approved: Asst Chief Engineer

http://PRR.Railfan.net
Collection of Walter Stafa