

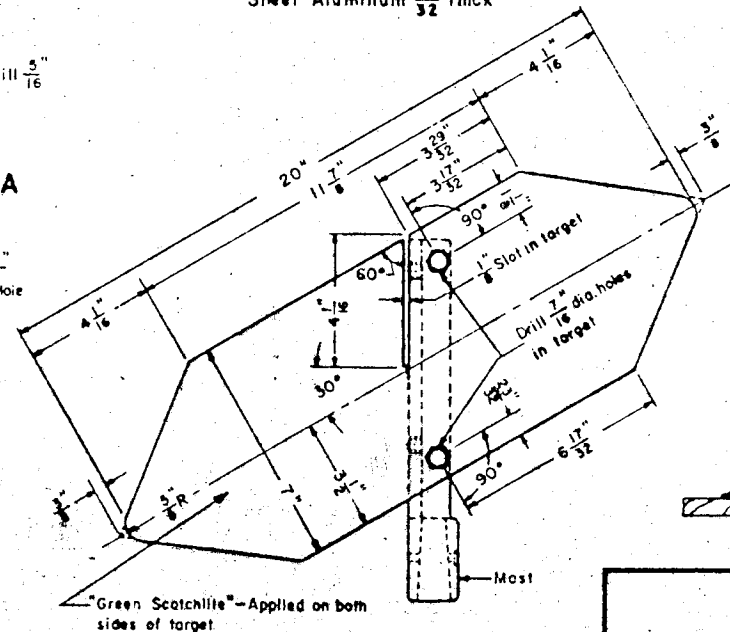
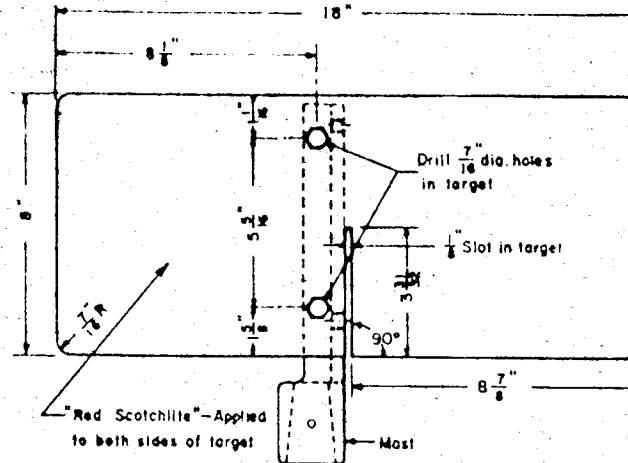
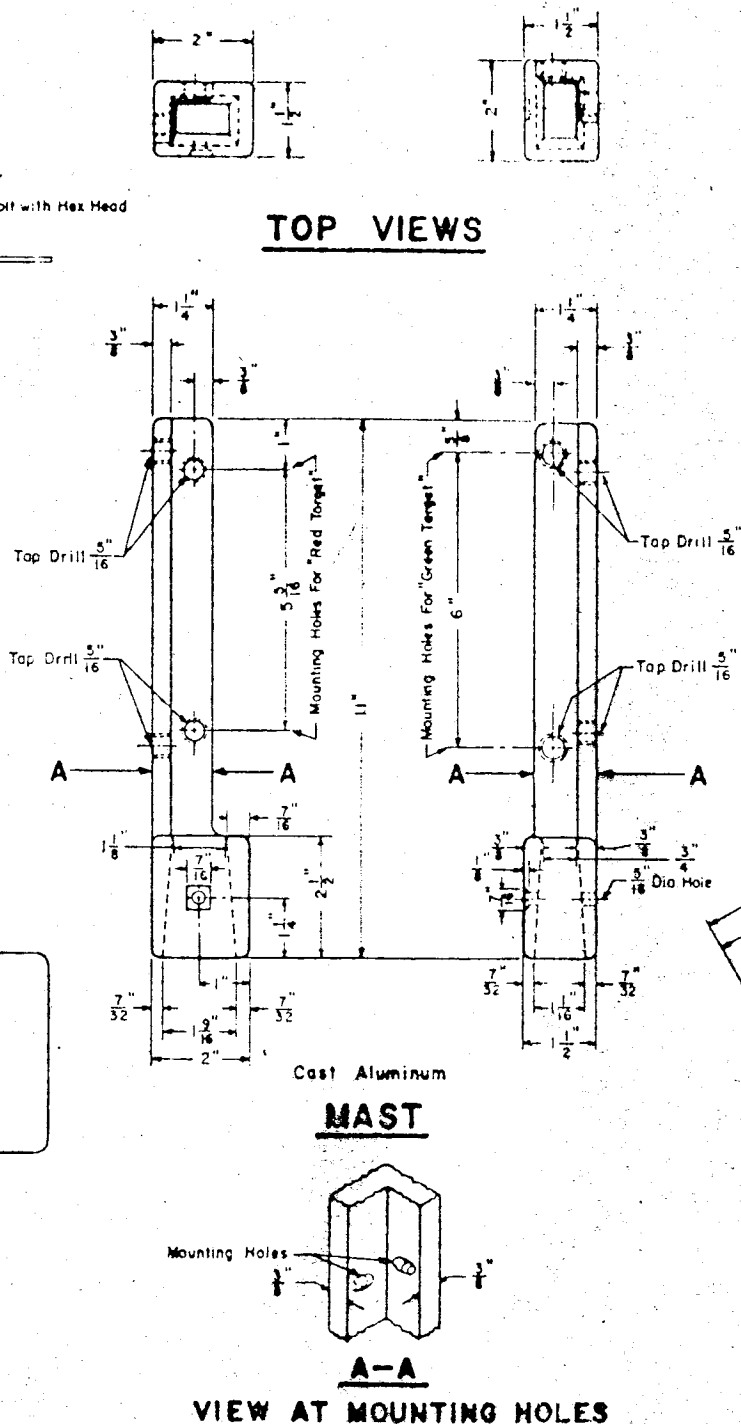
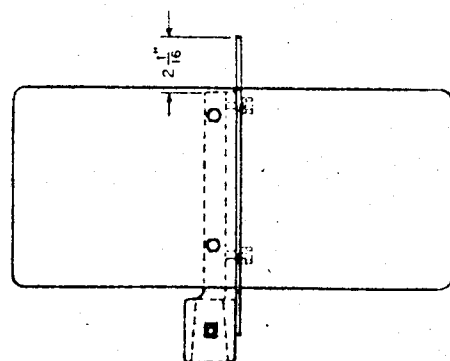
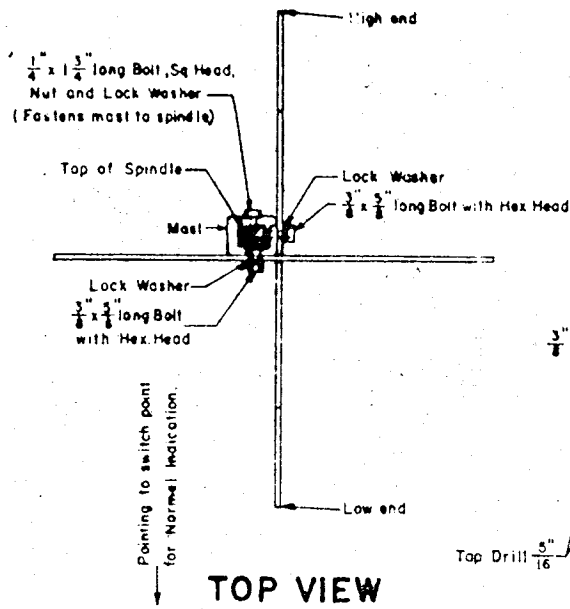




- ### NOTES
- 1-Reflectorized (scotchlite) Switch Target shall be used in accordance with "Penn Central Specifications for Construction and Maintenance of Track, M.W.-I" and where not prohibited by Public Authorities having jurisdiction.
 - 2-All corners and edges, of mast and targets, shall have a smooth finish.
 - 3-The aluminum surface of the targets shall be thoroughly cleaned with *Smulco* *Nal* before the application of scotchlite, by the use of heat (to activate the adhesive) and vacuum pressure (to mold the material to the aluminum surfaces).
 - 4-Care should be exercised when sliding targets into mast and fastening them to the mast to reduce the possibility of damaging the scotchlite material.

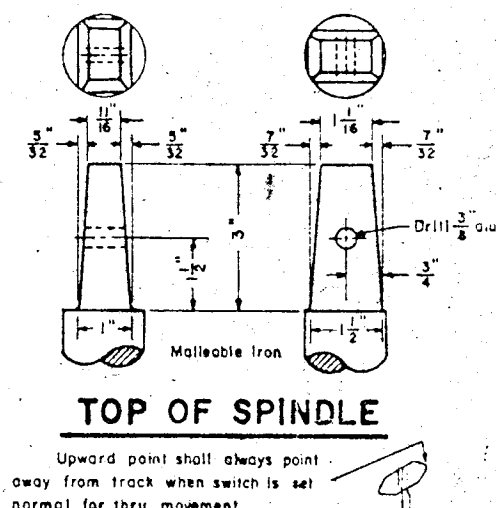

73917-B

PENN CENTRAL STANDARD SWITCH TARGET

REFLECTORIZED WITH SCOTCHLITE FOR USE WITH INTERMEDIATE OR HIGH MAST

NOVEMBER, 1970

Ch. of Eng. - Maintenance of Way

Chief Engineering Officer