




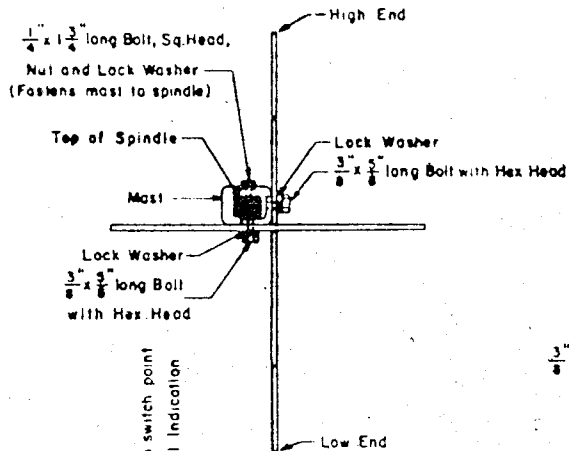


TOP VIEW



SIDE VIEW

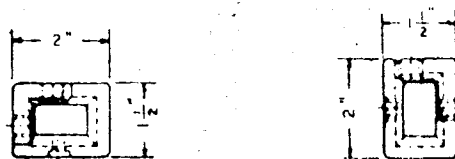


TOP VIEWS

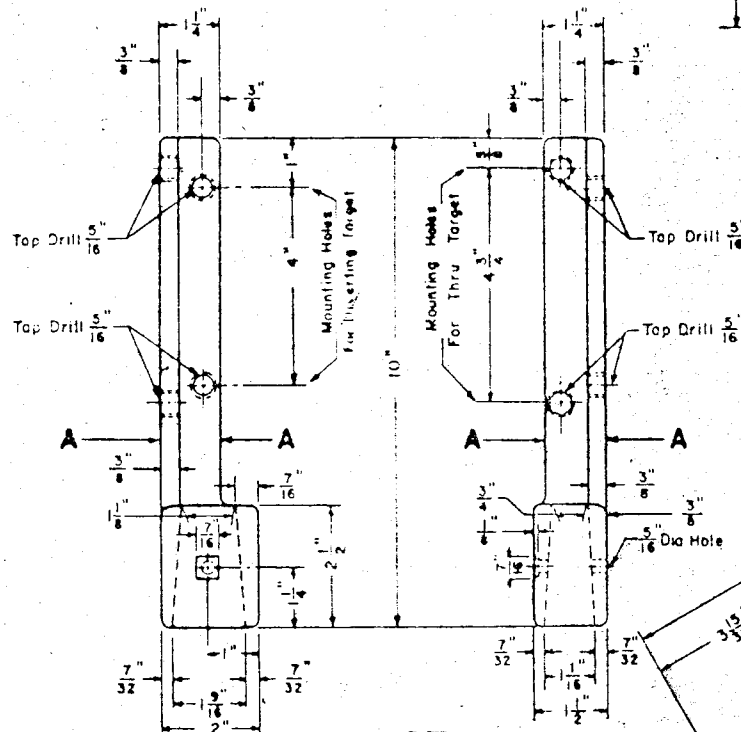


MAST


Cast Aluminum

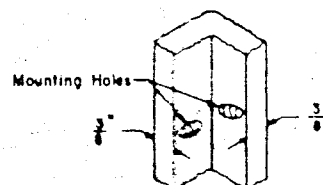

**A-A
VIEW AT MOUNTING HOLES**

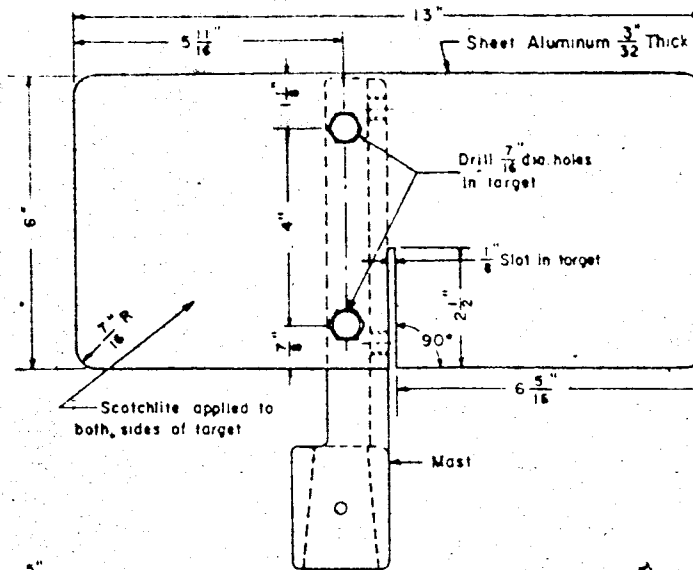

**INDICATION-REVERSE
TARGET DETAIL**

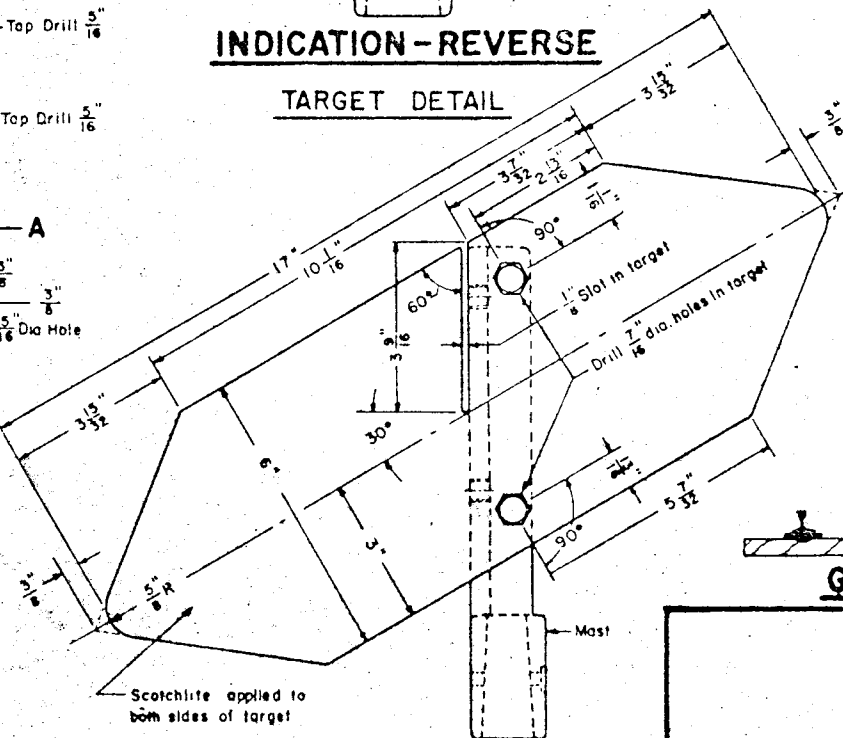


**INDICATION-NORMAL
TARGET DETAIL**

Sheet Aluminum 3/32 Thick

NOTES

- 1-ReflectORIZED (scotchlite) Switch Target shall be used in accordance with "Penn Central Specifications for Construction and Maintenance of Track, M.W.-1" and where not prohibited by Public Authorities having jurisdiction.
- 2-All corners and edges of mast and targets shall have a smooth finish.
- 3-The aluminum surface of the targets shall be thoroughly cleaned with *Smulco No. 1* before the application of scotchlite by the use of heat (to activate the adhesive) and vacuum pressure (to mold the material to the aluminum surface).
- 4-Care should be exercised when sliding targets into mast and fastening them to the mast to reduce the possibility of damaging the scotchlite material.

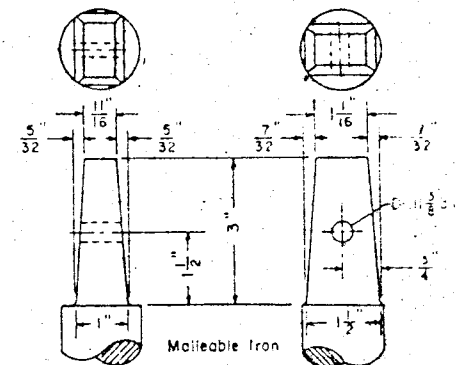

TOP OF SPINDLE

Upward point shall always point away from track when switch is set normal for thru movement



GENERAL APPLICATION

**PENN CENTRAL
STANDARD**

LOW SWITCH TARGET

REFLECTORIZED WITH SCOTCHLITE
FOR LOW STAND - MAIN OR YARD TRACK USE

NOVEMBER, 1970

Chief Engineer - Maintenance of Way

Chief Engineering Officer

73919-B